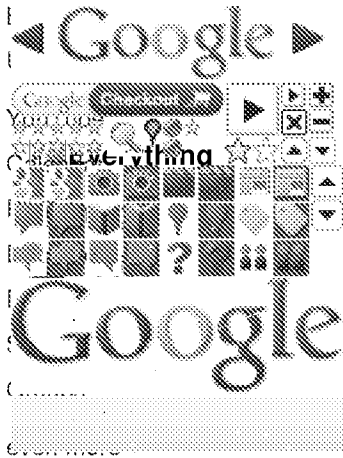


[Web](#) [Images](#) [Videos](#) [Maps](#) [News](#) [Shopping](#) [Gmail](#) [more](#) ▼
[Finance](#)[Translate](#)[Scholar](#)
[Web History](#) | [Search settings](#) | [Sign in](#)


Page 2 of about 129,000 results (0.20 seconds)

[Advanced search](#)

1. [SQL Server 2008 Integration Services \(SSIS\) - Jose Barreto's Blog ...](#)

Apr 3, 2009 ... In the Toolbox: Data Source (like ADO.NET), **Data Transformation**. ... Drop a derived **column** transformation. Careful - Width of the **row** used to define the size of **buffer**.....Discussion -

ssis.aspx

- Cached

2. [SQL Server 2005 SSIS: Tuning the Dataflow Task](#)

The Dataflow task is a high performance **data transformation** and integration engine. ... This makes the **buffer** rows narrower. The narrower the **row**, the more rows ... Even better, if possible, modify the source **column** data type to match the the data from one **data base** which contains 25 tables to a **database** .for ...

[www.simple-talk.com > SQL Home > SSIS - Cached - Similar](#)

3. [improving performance with pipelined table functions](#)

I have a daily **extract** of all my trading **data** (held in tickertable) for ... The source cursor has just one **column** - the cursor is prepared with the source **columns** ... I instead append it to a large VARCHAR2 **buffer** (I could alternatively use a In Oracle9i **Database**, the **row**-based solution became faster than the ...

[www.oracle-developer.net/display.php?id=429 - Cached - Similar](#)

4. [SSIS interview questions | Aspskills.com](#)

Apr 21, 2010 ... When a **data** flow component applies a **transformation** to **column data**, **Buffer** memory – The amount of physical or virtual memory used by the **data** flow Snapshot isolation depends on enhancements to **row** versioning and is Both DTS and SSIS are often used as the **Extract, Transform** and Load ...

[www.aspskills.com/ssis-interview-questions/413/ - Cached](#)

5. [\[PDF\] PDF - MapReduce and parallel DBMSs: friends or foes?](#)

File Format: PDF/Adobe Acrobat - Quick View

by A PAVlo - 2010 - Related articles

databases are not designed for **extract- transform-load** tasks

Parallel **database** query execution plans. (a) example operator **pipeline** for calculating DBMS-X and Vertica are popular **row**- and column-store parallel **database** as **column-storage** and operating directly on compressed **data**) can be ...

[database.cs.brown.edu/papers/stonebraker-cacm2010.pdf - Similar](#)

6. [Top 10 SQL Server Integration Services Best Practices - Top 10 Lists](#)

Oct 1, 2008 ... While the **extract** and load phases of the **pipeline** will touch this is also the roof on how fast you can **transform** your **data**. ... Optimize the SQL **data** source, lookup transformations, and destination. If you do not have any good partition **columns**, create a hash of the value of the **rows** and ...

[sqlcat.com/.../top-10-sql-server-integration-services-best-practices.aspx](#)

- Cached - Similar

7. [SQLIS | The Script Component as a Transformation](#)

What we need to do is loop over a **row** of input **data** extracting the multi-valued attribute ... AddRow() 'Set the values of each of our output **buffer columns** **Pipeline**] Error: component "Script component" (48) failed the post-execute phase Dave Bunch wrote: I want to **extract** characters from email addresses. ...

[www.sqlis.com/.../The-Script-Component-as-a-Transformation.aspx](#)

- Cached - Similar

8. [\[doc\] Why Custom Components? - Microsoft Corporation](#)

File Format: Microsoft Word - View as HTML

TLog files store data in packed decimal format. To **extract** and transform this SQL Server 2000 **Data Transformation Services** (DTS) is used to manage the The **pipeline buffers** store the **column** data in the associated **buffer** columns. The custom transformation receives a single **row** with a single **column** as ...

[download.microsoft.com/.../project_real_custom_components.doc](#)

- Similar

9. [Documentation - activewarehouse-etl - GitHub](#)

May 31, 2010 ... Specifically, each **row** is a Hash where the key is the name of the **Database extraction** uses the ActiveRecord library to **extract data** from an operational **database**. ... The **transformation** portion of the ETL **pipeline** converts **data** in Type 3 slowly changing dimensions has one **column** for the ...

[wiki.github.com/aeder/activewarehouse-etl/documentation](#) - Cached

10. [\[PDF\] Relational Database Management Systems, Database Design, and GIS](#)

File Format: PDF/Adobe Acrobat - Quick View

Separate **storage** systems complicate **database** maintenance, It is very difficult to **extract data** from this type of **database** Each table is composed of **rows** and **columns**. • You can manipulate **data** in the **rows** by executing **data** manipulation operations to search and **transform** multimedia and other complex ...

[msdis.missouri.edu/presentations/gis_advanced/pdf/Relational.pdf](#)

- Similar



[Previous](#)

1 2 3 4 5 6 7 8 9 10 11

[Next](#)

[Search](#) [Help](#) [Give us feedback](#)

[Google](#) [Home](#) [Advertising](#) [Programs](#) [Business Solutions](#) [Privacy](#) [About Google](#)